




## Data Sheet - Terminals










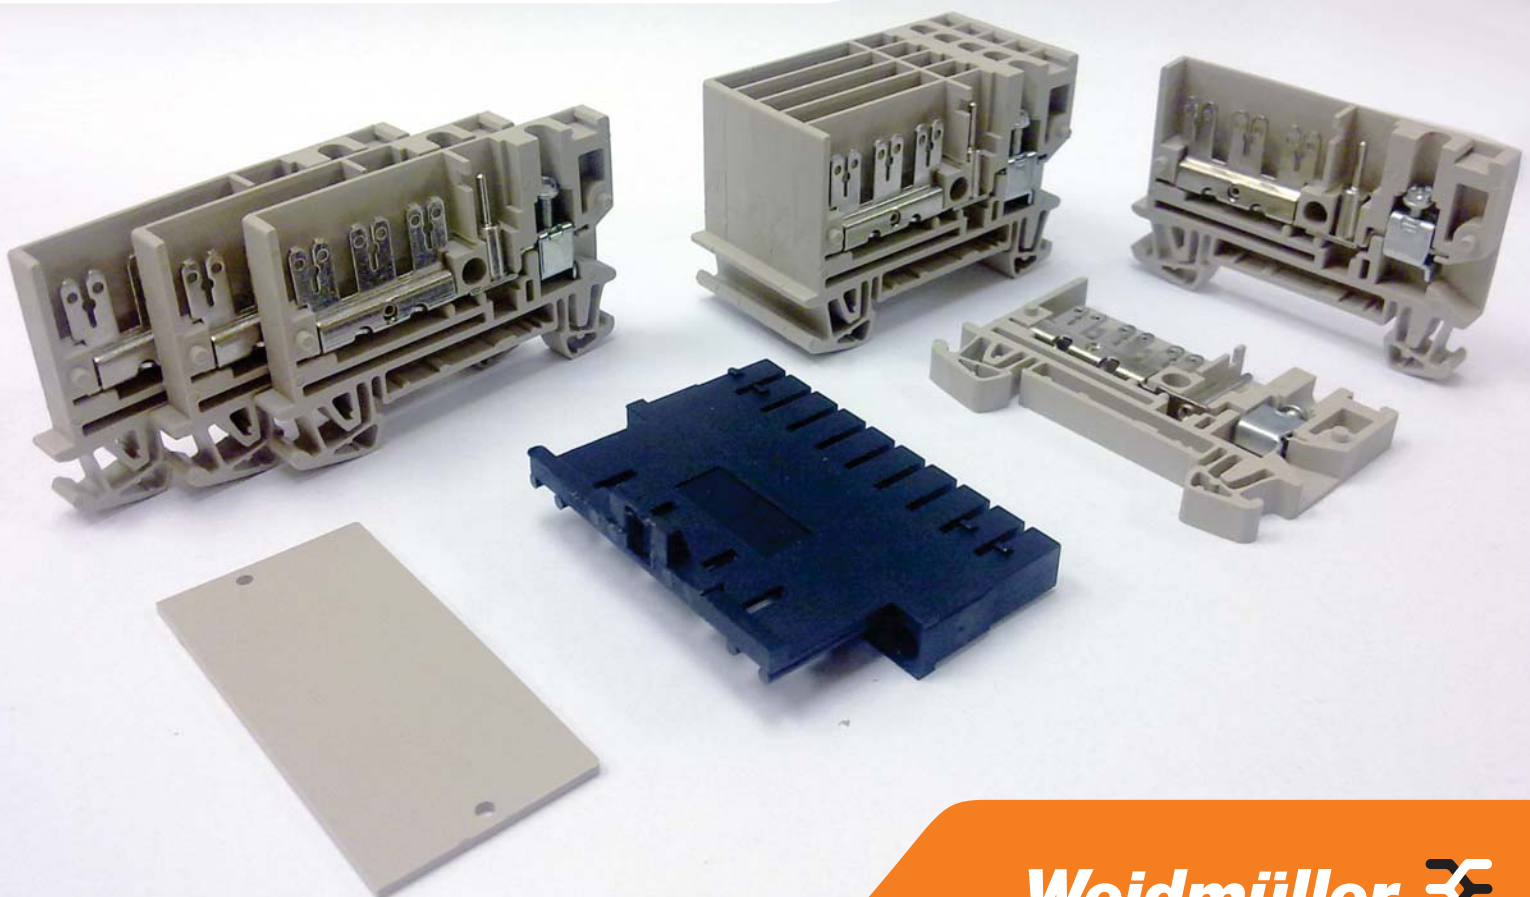

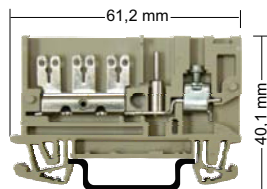
Screw, Snap-on and Plug connection - AST5N



# Screw, Snap-on and Plug connection

## AST5 N



Width ( mm +0,2 )		6,0	
Insulating material		Wemid (V0)	
Rated data		IEC	
Voltage		630V	
Current		20A	(screw / snap-on)
Current		7 A	(screw / plug) (snap-on / plug)
Cross-section		0,5...4 mm <sup>2</sup>	
Impulse voltage		4 KV	
Pollution severity		3	
Torque range		0,4 a 0,6 Nm	
Conductor stripping		10mm ± 0,5mm	
Ordering Data	(Beige)		<b>C905630.6000</b>
Accessories			
End plate ( thickness - mm )	Wemid (V0)	(1,0)	<b>C905642.6000</b>
			
Crimp contacts	CB1,6 / CS1,6		<b>1427900000</b>
	 4 0.157" 20.6 0.811"	CB socket 	
Plug	PA (V0)		<b>C905639.6000</b>
			
Flat blade receptacles (with copper sleeve)			
		● 0,5...1,5 mm <sup>2</sup>	<b>9200540000</b> Dimensions 6,3 x 0,8 mm
		● 1,5...2,5 mm <sup>2</sup>	<b>9200560000</b> Dimensions 6,3 x 0,8 mm
End brackets			
	 EW35	EW35 - TS 35 - (8,5mm)	<b>C038356.0000</b>
	 WEW35/2	WEW35/2 - TS 35 - (8,0mm)	<b>1061200000</b>
		WEW35/1 - TS 35 - (12,0mm)	<b>1059000000</b>
Rails			
		TS 35 aluminium 	<b>C033080.0000</b>
		TS 35 steel 	<b>C038340.0000</b>
		TS 35 steel slotted 	<b>C051450.0000</b>
Remarks			
		① Conector - IEC 60 947 - 7 - 1	
		② Snap-on - IEC 61 210	
		③ Plug - IEC 61 984	

Weidmüller Conexel do Brasil  
 Rua Garcia Lorca, 176 - V. Paulicéia  
 09695-900 - São Bernardo do Campo  
 São Paulo - Brazil  
 Phone +55-11-4366-9610  
 Fax +55-11-4362-1677  
 E-mail vendas@weidmueller.com.br  
 Website www.weidmueller.com.br

We reserve the right to make technical changes.